


Data Sheet

HL63263DG

638nm / 200mW AlGaInP Laser Diode




Outline

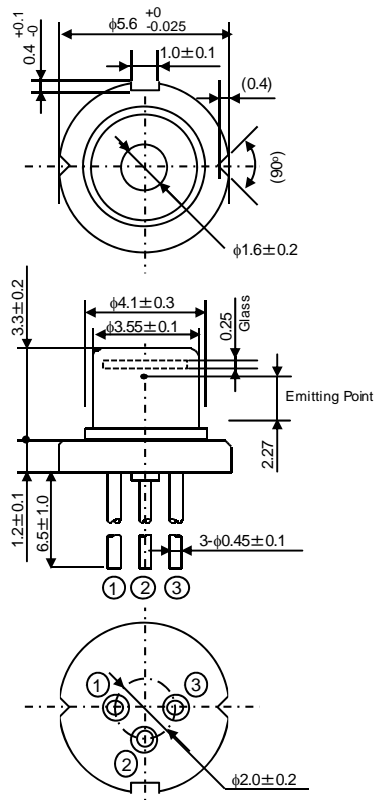

(Unit: mm)

Internal Circuit

•HL63263DG



Features

- Shorter wavelength: 638nm Typ.
- High optical output power: 200mW
- Low operating current: 280mA Typ.
- Small package: $\phi 5.6$ mm
- Single transverse mode
- TE mode oscillation

Application

- Show Laser system
- Light source of optical equipment

Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Ratings	Unit
Optical output power (1) (Tc=-10~+30 °C) ^{Note1)}	Po(1)	200	mW
Optical output power (2) (Tc=+40 °C) ^{Note1)}	Po(2)	180	mW
LD Reverse Voltage	VR(LD)	2	V
Operating Temperature ^{Note1) 2)}	Topr	-10 ~ +40	°C
Storage Temperature	Tstg	-40 ~ +85	°C

Note1) Absolute maximum rating of optical output power vs. operating temperature is specified by figure.1.

Note2) Operating temperature is defined by Case temperature "Tc". High increase in temperature of LD chip itself is expected during operation due to high current density. Thus, without proper heat dissipation, it is observed that no specific output power is achieved or it results to LD degradation. It is advised that sufficient measure of heat dissipation should be taken so that LD's maximum operating temperature is not exceeded during actual operation.

Optical and Electrical Characteristics (Tc=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Threshold current	Ith	-	75	100	mA	-
Operating current	Iop	-	280	330	mA	Po=200mW
Operating voltage	Vop	-	2.9	3.3	V	Po=200mW
Beam divergence Parallel to the junction	θ//	5	8	11	°	Po=200mW, FWHM
Beam divergence Perpendicular to the junction	θ⊥	10	14	18	°	Po=200mW, FWHM
Lasing Wavelength	λp	633	638	643	nm	Po=200mW






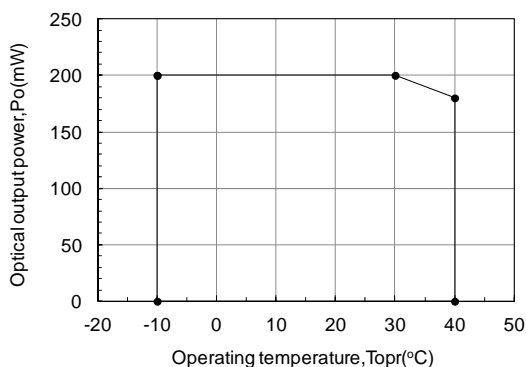


Figure.1 Optical output power vs. Operating temperature

Typical Characteristic Curves

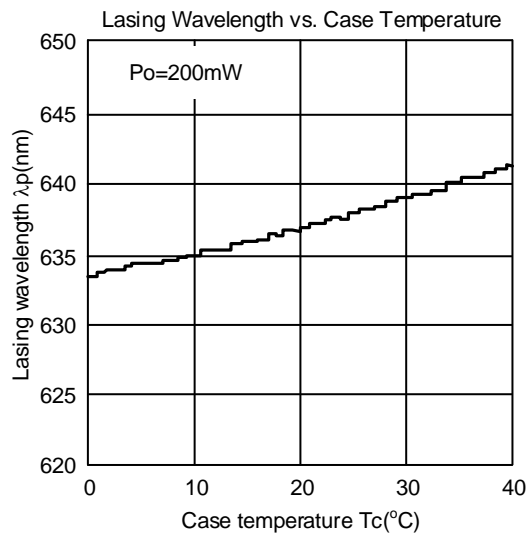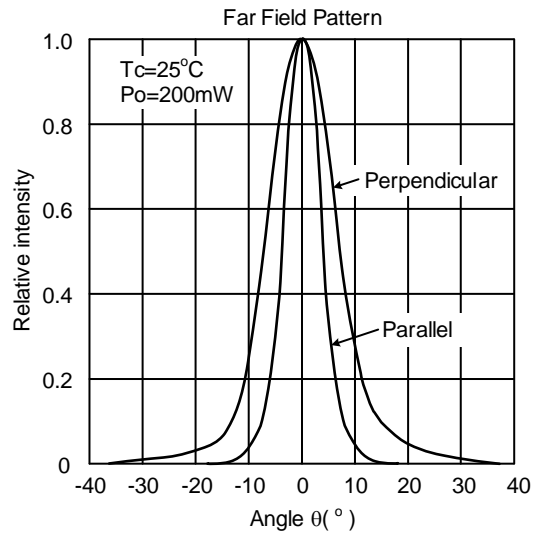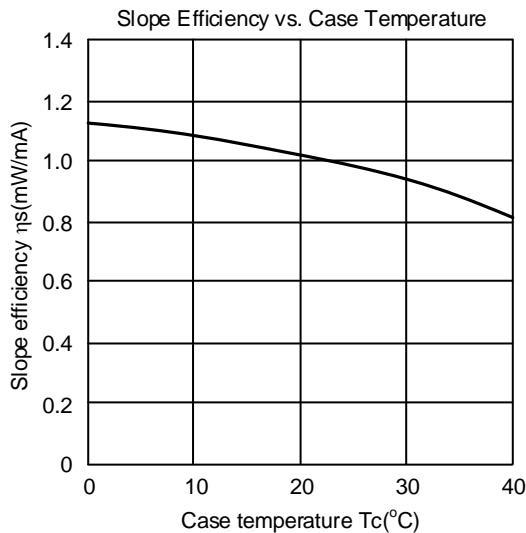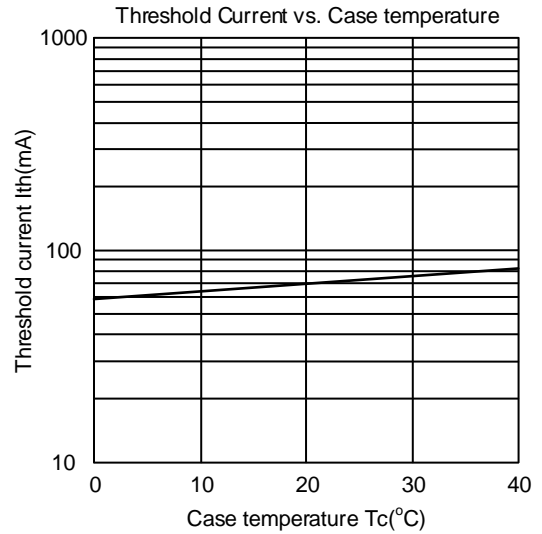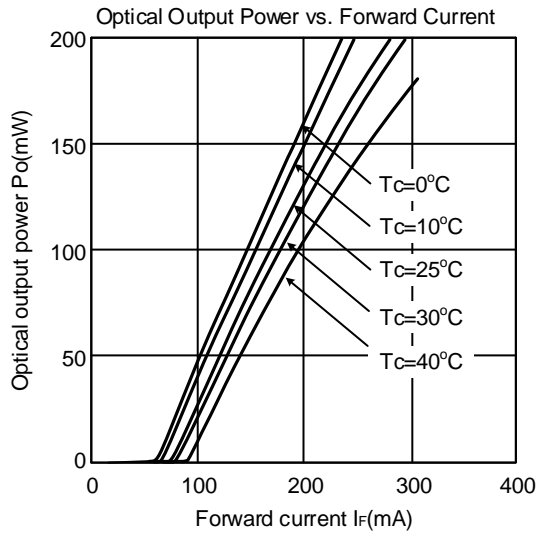

Data Sheet HL63263DG Rev2. Apr.8. 2015

Cautions

- 1.USHIO OPTO SEMICONDUCTORS,INC.(UOS) neither warrants nor grants licenses of any our lights or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document, UOS bears no responsibility for problems that may arise with third party's right, including intellectual property rights, in connection with use of the information contained in this document.
- 2.Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3.UOS makes every attempt to ensure that its products are of high quality and reliability. However, contact our sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic safety equipment or medical equipment for life support.
- 4.Design your application so that the products is used within the ranges guaranteed by UOS. particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. UOS bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating UOS product does not cause bodily injury, fire or other consequential damage due to operation of the UOS product.
- 5.This product is not designed to be radiation resistant.
- 6.No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from UOS.
- 7.Contact our sales office for any questions regarding this document or UOS products.

- 1.The laser light is harmful to human body especially to eye no matter what directly or indirectly. The laser beam shall be observed or adjusted through infrared camera or equivalent.
- 2.This product (without violet laser diode) contains gallium arsenide (GaAs), which may seriously endanger your health even at very low doses. Please avoid treatment which may create GaAs powder or gas, such as disassembly or performing chemical experiments, when you handle the product. When disposing of the product, please follow the laws of your country and separate it from other waste such as industrial waste and household garbage.

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by UOS before they become applicable to any particular order or contract. In accordance with the UOS policy of continuous improvement specifications may change without notice. Further details are available from any UOS sales representative.



Caution - use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.